

# NIGHT-LITE™ GR-SERIES

## CHAIN

Simpler, lighter, lower cost, the **Night-Lite™ GR-Series Chain** light tower brings tow-ability to chain towers providing the most easily deployed and easy-to-maneuver unit in its class. Flexibility in power is inherent with this unit allowing for any power source with 15 amp or 20 amp connections to illuminate a job site.

To increase the impact of the **Night-Lite™ GR-Series Chain** tower, the ability to daisy chain units is a built-in feature. Four LED fixtures with 147,344 total lumens will provide plenty of light for any space. This unit saves money immediately shipping 20 units on a truck.



# KEY FEATURES

## Night-Lite GR-Series Chain

**(4) 250W SMD Style LED Light Fixtures**

**Mast**  
Flexible lighting with a vertical mast extending to 23 feet (7 meters)

**50 MPH (80 km/h) Operating Wind Speed Rating**

**Vertical Tower**  
Easy to raise and lower with a dual-handle manual winch

**355 Degree Rotation**  
Increase flexibility in light spread

**Foldable Tongue**  
Takes up less space on the job-site and in your yard

**Standard Trailer Coupler 2" Ball**

**Heavy-duty Leveling Jacks**

**Stabilizers**  
Steel tongue jack foldable with dual pins, 3 point outriggers

**Forklift Pockets**  
easily load and unload equipment

**Max Height**  
23 ft 0.0 in (7,010 mm)

**Height**  
Transport Position  
98.4 in (2,499 mm)

**Controls**  
Simple, easy to use

**Timer**  
Programmable on/off functionality

**Photocell**  
Dawn to dusk on/off functionality

**Lifting Eye**

**Width**  
48 in (1,245 mm)

**Length**  
76.8 in (1,956 mm)

**Chaining Capability**  
Up to two units off a single power source

**15amp Connector**

**20amp Connector**

**CSA Approved**


**Removable Storage Box**  
Cord and other tool storage

**Space for Inverter**  
Remove storage box for space to store a power source on the unit

**Compact Design**  
fit 20 units on a 48 ft flatbed, 22 units on a 53 ft flatbed more units for the same shipping cost

**Easy Access**  
Wide area rear door for ease of access maintenance


**Welded steel frame with lockable door**

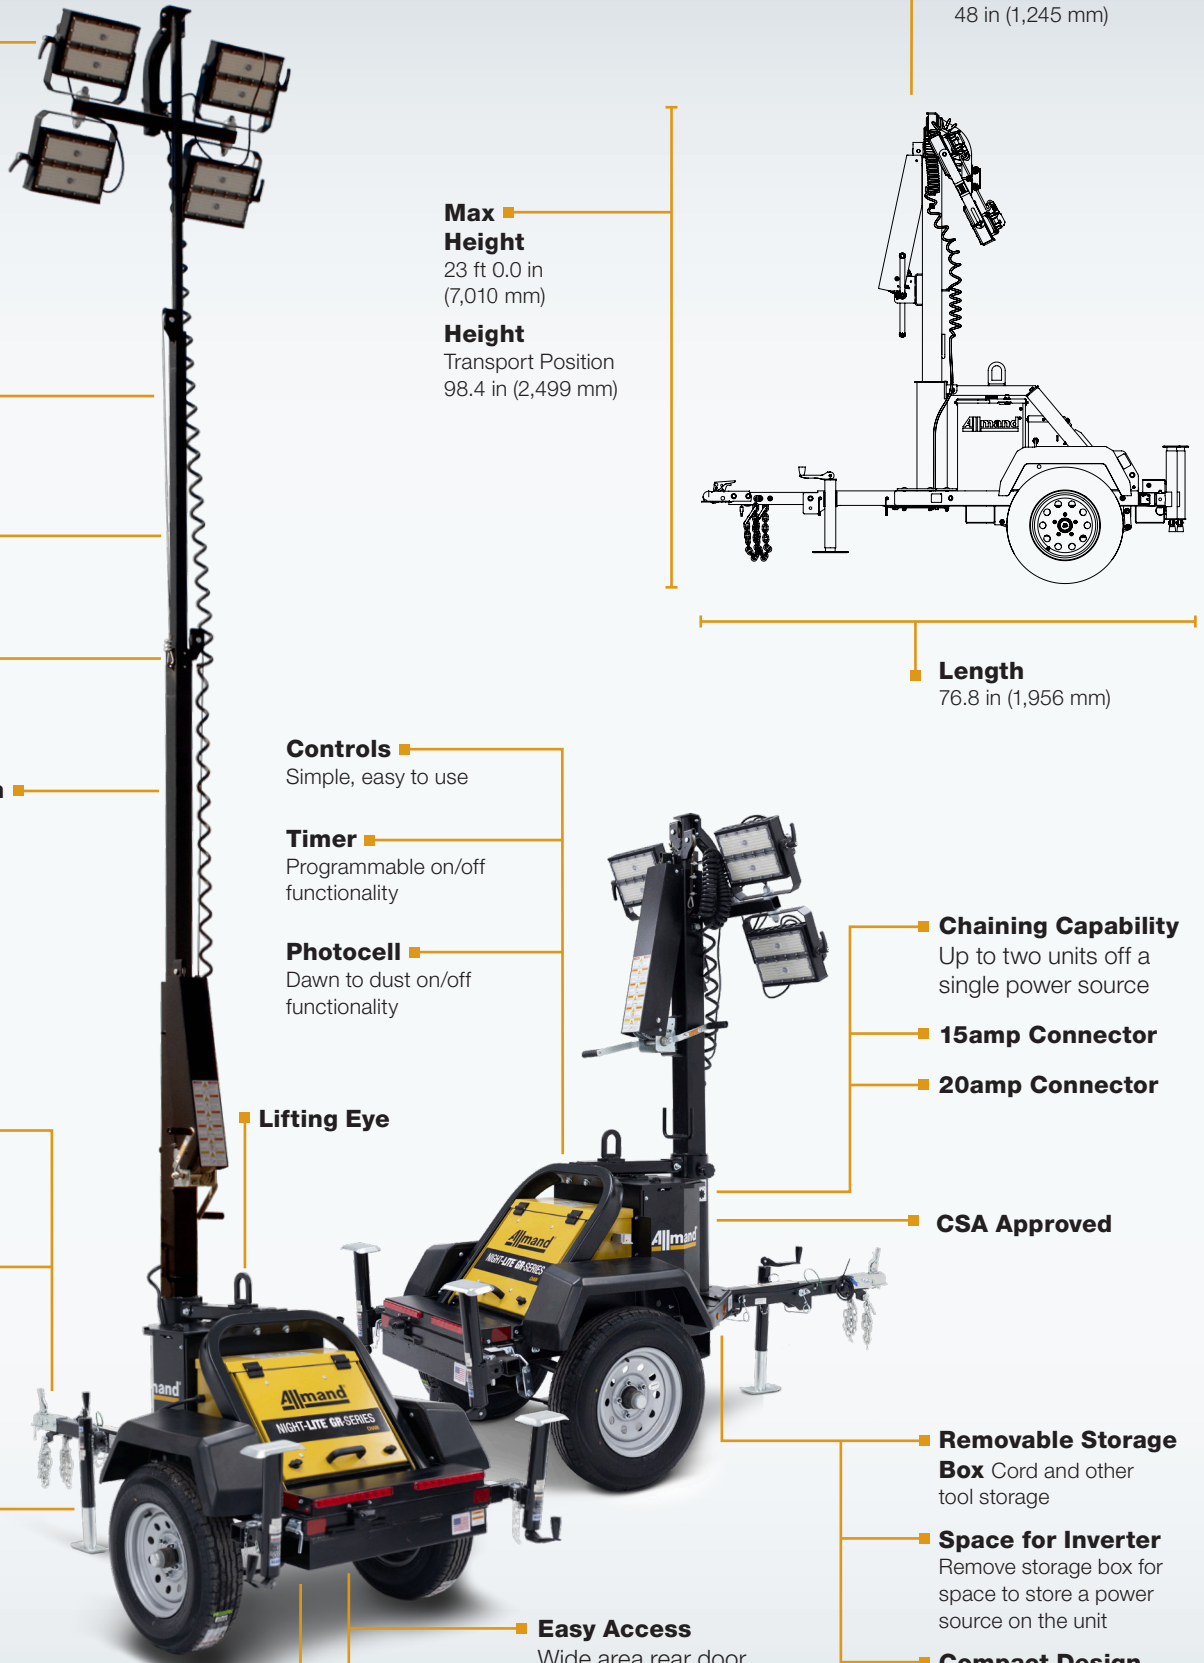

Model	NLGR C
Power Consumption - Per Fixture (W)	250
Lumens Per Fixture	38,081
Lumens - Total	152,324
LED Life (hrs)	50,000
Weights & Shipping	
Weight lbs (kg)	750 (340)
Number of Units on 48' Flatbed	20
Number of Units on 53' Flatbed	22

**LIGHT COVERAGE**

**152,324 Total Lumens**

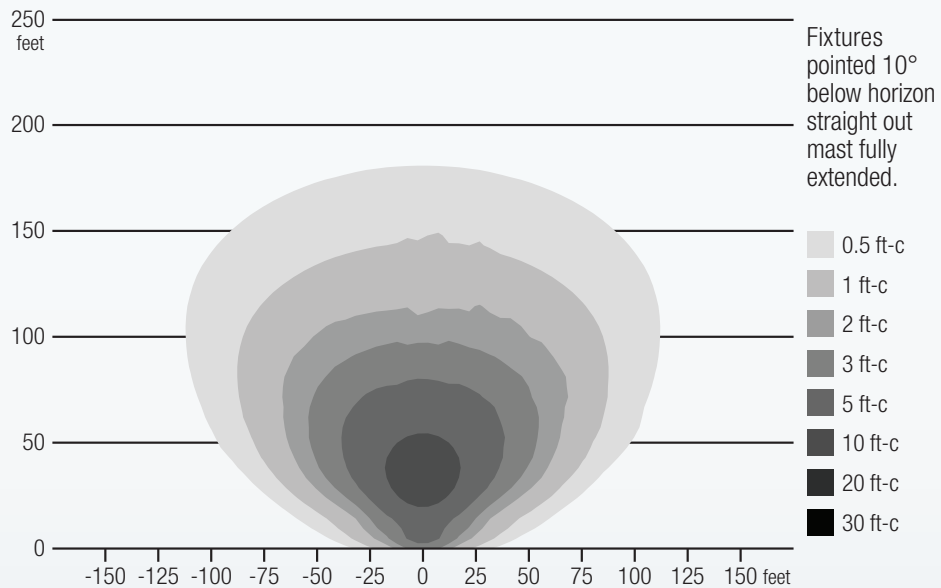

**Night-Lite™ GR-Series Chain**  
**with 4 - 250W LED Light Output**  
 Area Lit to 0.5 Foot Candle (ft-c)  
 or Higher: 34,650 ft<sup>2</sup>

# OPTIONS

## Night-Lite GR-Series Chain

LED Diffuser Panels

Custom Paint

# ALLMAND 250W LED COMPARED TO LEADING COMPETITOR LED LIGHTS


### Allmand 250W LED vs 240W LED

- **Ft<sup>2</sup> Area Illuminated**
  - 34,650 ft<sup>2</sup> vs 27,600 ft<sup>2</sup>
  - 7,050 ft<sup>2</sup> additional area
  - 26% increase in light coverage
- **Lumen Output**
  - 152,324 vs 139,200 total lumens
  - 13,124 additional lumens
  - 9% increase in light brightness

Allmand Data obtained by 3rd party independent test lab for LED lamps set at 10° below horizon. Note: See individual product sale sheets for each light plant light map details.

### Night-Lite™ GR-Series Chain

### Competitor

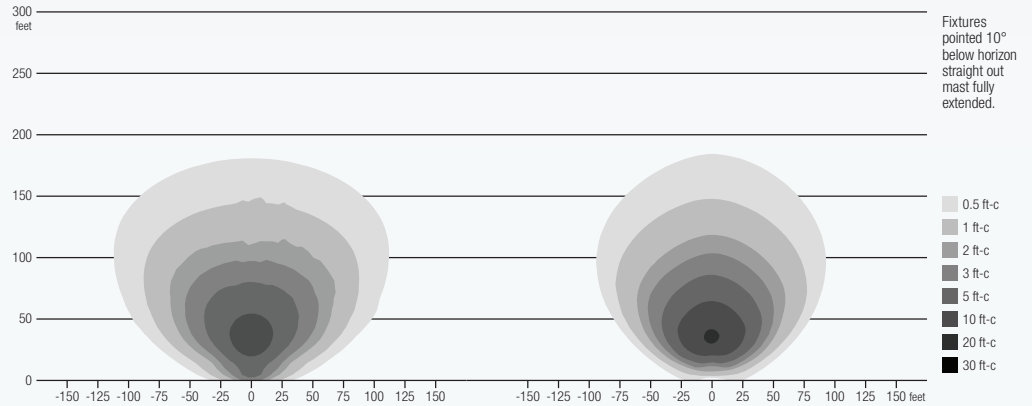

**4 - 250W LED Light Output**  
23 ft Mast Height  
Area Lit to 0.5 Foot Candle (ft-c)  
or Higher: 34,650 ft<sup>2</sup>

**4 - 240W LED Light Output**  
32 ft Mast Height  
Area Lit to 0.5 Foot Candle (ft-c)  
or Higher: 27,600 ft<sup>2</sup>



## COMPROMISE NOTHING.

At Allmand, our sole focus is providing jobsite support equipment to help your customers get the job done. Whenever they need it. Wherever they are. And whatever it takes. What's more, our genuine commitment to you — the highest standard of service and lowest total cost of ownership — is simply unmatched. Choose the equipment that comes with complete confidence that jobsite productivity won't go dark at 2 a.m.

**Allmand. Above All.**

**Allmand**

**BRIGGS & STRATTON**  
Milwaukee, WI 53201-0702 USA  
(414) 259-5333  
Copyright ©2023. All rights reserved.