



MAXI-POWER™ 25

Maximize the power of your job site with the **Maxi-Power™ 25** Mobile Generator. This generator comes equipped with a heavy-duty, oversized alternator equipped for starting any motor size needed. With a frequency switch for flexibility of job site power needs, and 15" tires for longer wear and greater towing capabilities, this generator will last and deliver the power you need to get the job done.



KEY FEATURES

Maxi-Power 25

Standard Programmable Start / Stop for Standby Applications

Lockable Switch / Voltage Selector

EFPA (Electric Fuel Primer & Air-Bleed) Pump

Voltage Single Phase – Switchable
120 V / 240 V

Voltage Three Phase – Switchable
120 V / 208 V
277 V / 480 V



Trailer DOT Compliant 49 CFR

Side Fork Pockets

Curbside Fluid Maintenance

Oversized Electrical Lugs


Large Capacity Fuel Tank

Fluid Containment System (FCS)

Holding up to 110% of all on-board fluids

Standard External Fuel Connections

| Model Number | MP25 |
|---|---|
| Engine Brand | Isuzu |
| Engine Model | 4LE2T |
| Engine Tier | Tier 4 Final |
| Mechanical Output at Rated Speed (HP)*** | 33 |
| Standby Power – kVA (kW) | 27.5 (22) |
| Prime Power – kVA (kW)** | 25 (20) |
| Battery (V) | 12 |
| Voltage Regulation Percentage | 0.50% |
| Amperage Single Phase 120 V (A) | 60 x 2 |
| Amperage Single Phase 240 V (A) | 60 |
| Amperage Three Phase 120 V / 208 V (A) | 69 |
| Amperage Three Phase 277 V / 480 V (A) | 30 |
| Excitation | Brushless with AVR |
| Armature Connection Layout | Star with Neutral/Zig/Zag |
| Insulation Class | Class H4 |
| Integral Fuel Tank Capacity - gal* (L) | 52 (196.8) |
| Run Time @ Full Load (hrs) | 31+ |
| Main Breaker Size (Amps) | 100 (80%) |
| Receptacle Descriptions | NEMA 5-20R (GFCI Duplex Receptacle) - qty 2 |
| | CS6369 (50A 3 Prong Locking Receptacle) - qty 2 |
| Sound Level @ 23ft – No Load – dBA | 63 dBA |
| Engine Oil Change Interval (hrs) | 500 |
| Engine Fuel Filter Change Interval (hrs) | 500 |
| Weights | |
| Dry Weight - lbs (kg) | 2,425 (1,100.0) |
| Operating Wet Weight - lbs (kg) | 2,780 (1,261.0) |
| Trailer GVWR - lbs (kg) | 2,900 (1,315.4) |
| Number of Units on 48' or 53' Flatbed Truck | 7 |

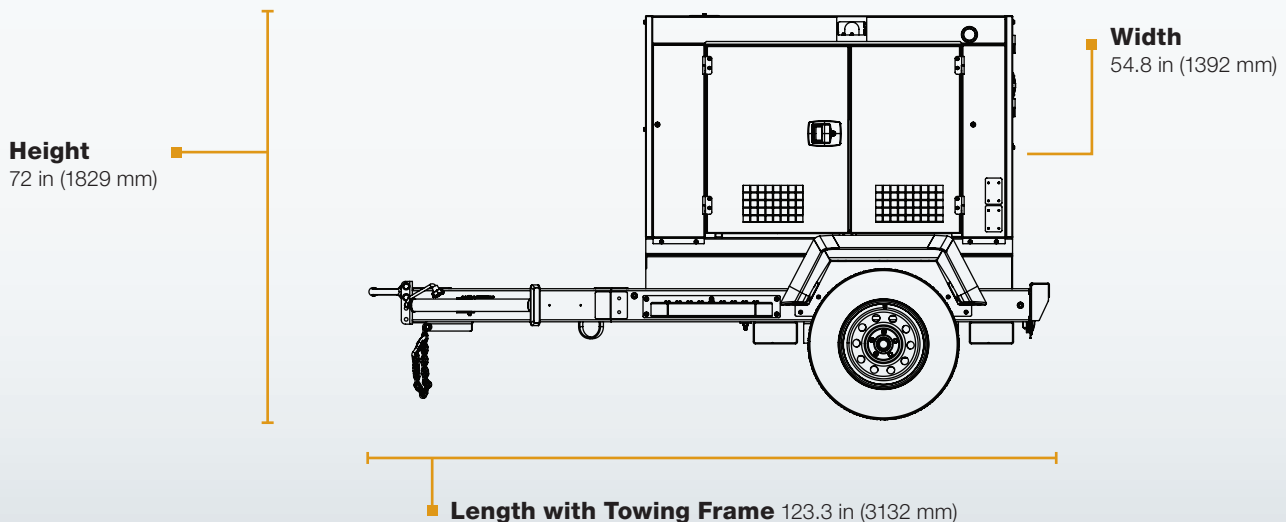

* Unit runs at full load for 24+ hours. ** See operator's manual or www.allmand.com website for complete warranty details. *** Prime generator electrical output per Allmand® testing. Allmand® has a policy of continuous product improvement and reserves the right to modify its specifications at any time and without prior notice.

OPTIONS

Maxi-Power 25



Camlocks

- Interchangeable electrical connectors that can be used in either single or three phase modes
- Single set of 5 camlocks



Battery Charger

- 5 A 120 V battery charger with 3 stage charge cycle



Arctic Package

- 50 W 120 V battery heater blanket
- 1,000 W 120 V thermosiphon block heater with thermostat to maintain temperature
- Battery Charger

Telematics Package

(Customer supplied - consult factory for lead times)

Lockable Battery Disconnect

Skid Mounts

Hitch Coupler Options

- 2" Ball
- 2" Bulldog
- 2-5/16" Ball
- 2-5/16" Bulldog
- Lunette Ring



COMPROMISE NOTHING.

At Allmand, our sole focus is providing jobsite support equipment to help your customers get the job done. Whenever they need it. Wherever they are. And whatever it takes. What's more, our genuine commitment to you — the highest standard of service and lowest total cost of ownership — is simply unmatched. Choose the equipment that comes with complete confidence that jobsite productivity won't go dark at 2 a.m. **Allmand. Above All.**

