



MAXI-POWER™ 8XR

The NEW **Maxi-Power 8XR**, is an Allmand® compact workhorse single-phase towable generator providing up to 8kW of prime power. The small rugged design is durable for job site and event applications, such as powering work sheds or small equipment. Whether it is providing power for building on the construction site or for a concert event the Maxi-Power 8XR gets the job done.



KEY FEATURES

Maxi-Power 8XR

- **8 kW / 8 kVA Single-Phase Towable Generator**
- **45 Gallon (170 liter) Fuel Tank** for extended runtime
- **All Steel Construction** with durable powder coat finish
- **Tool Box** Storage for power cables, tools, etc.
- **2" Ball Coupler**
- **Foldable Tongue** Takes up less space on the job site and in the rental yard
- **Removable Tongue**

Lift Ring

Emergency Stop

Deep Sea Controller

with on screen fuel gauge, low fuel shutdown, scheduling, and auto-start

Standard Outlet Package

(1) 20A GFCI,
(1) 30A Twist Lock,
(1) 30A RV

VIN Package


Stop, turn, tail lights / side marker lights / illuminated license plate bracket

■ **110% Fluid Containment System** of all on-board fluids

■ **Tubular Axle** with elliptical leaf springs


■ **Tires** ST175 / 80R13 load range 'C'

■ **Forklift Pockets** below the frame

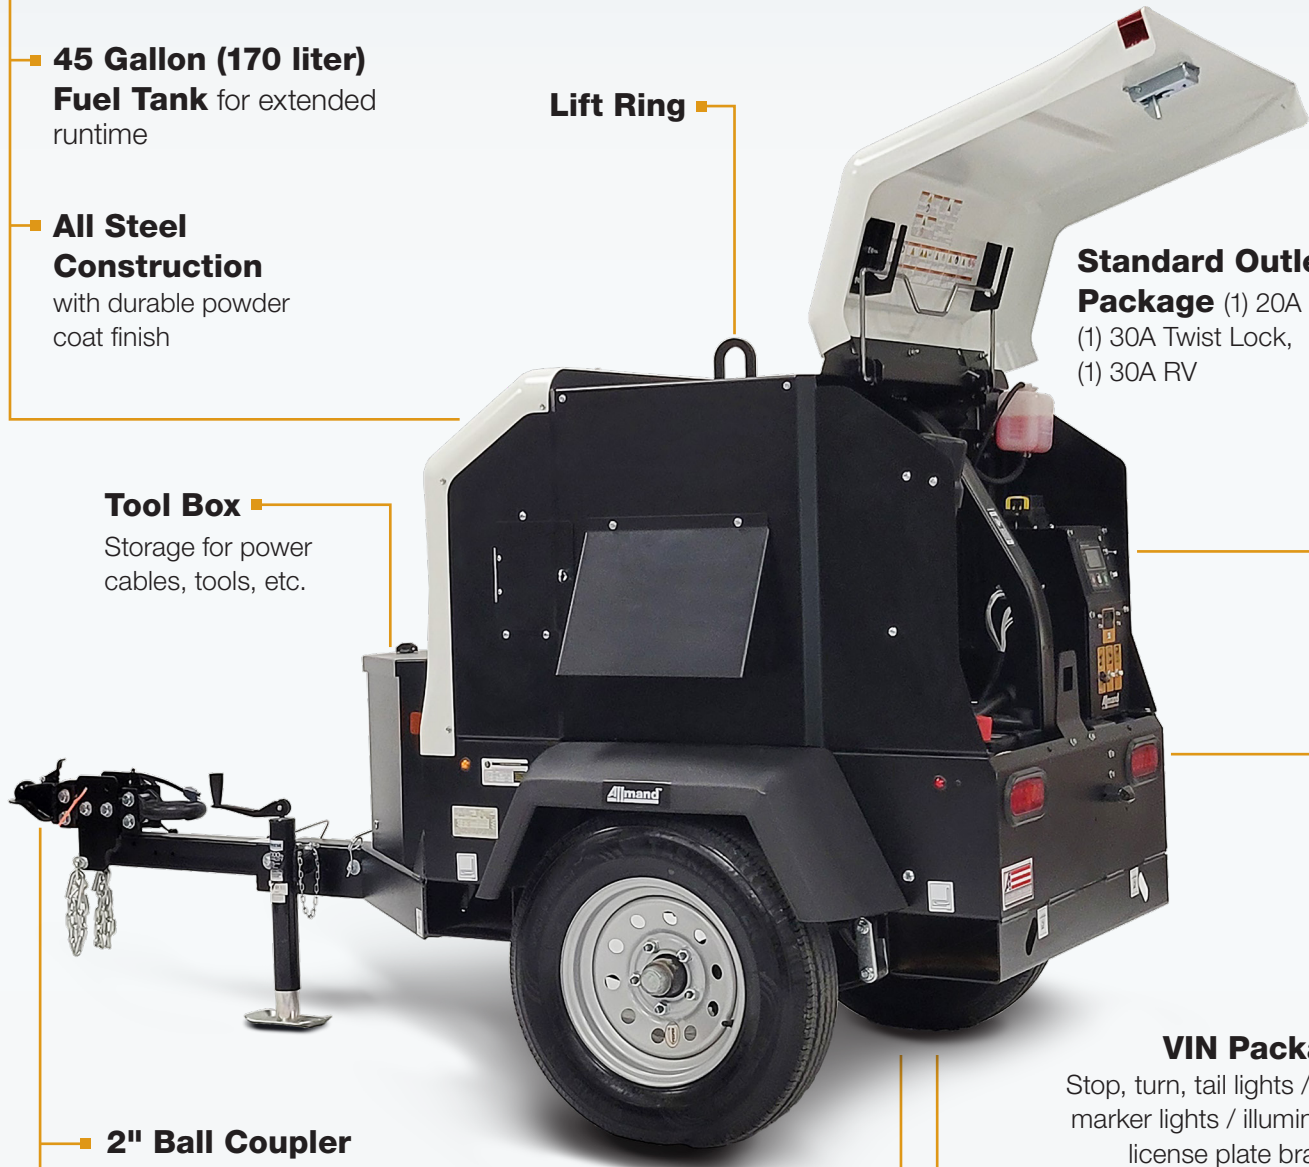

Model Number	MP 8XR
Engine Make / Model	Kubota D1105
Engine - Generator Control Interface	Deep Sea L401
Mechanical Output (Continuous Hp)***	11.6
Prime Power kVA (kw)*	8 (8)
Maximum Ambient Operating Temperature @ Full Output	120 °F (49 °C)
Run Time @ Full Load (hr)**	57*
Sound Level @ 23ft - Full Load- dBA	65.8*
Sound Level @ 23ft - No Load- dBA	65.4*
Engine Oil Capacity - qt (L)	5.4 (5.1)
Alternator	Linz AVR
Insulation Class	Class H
Battery (V)	12
Oil Change Interval (hr)	1000
Weights	
Gross Vehicle Weight Ratings - GVWR - lbs (kg)	2,200 (997.9)
Shipping Weight - lbs (kg)	1,885 (855)
Number of Units on 48' Flatbed	18 units
Number of Units on 53' Flatbed	20 units

Height
57 in (1,448 mm)

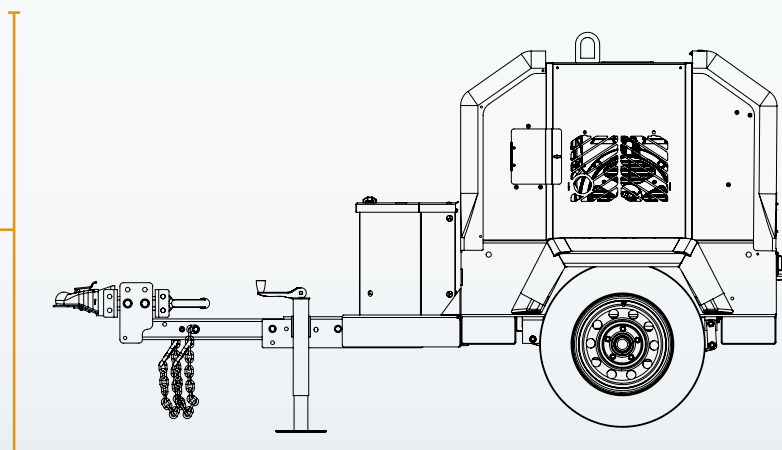

Width
53 in (1,346 mm)

Trailer Length
104 in (2,642 mm)

* Data estimates per Allmand® testing, values are subject to change. ** Based on one hour run test full fuel tank consumption. *** All power levels are stated gross horsepower as rated by the engines manufacturers. Allmand has a policy of continuous product improvement and reserves the right to modify its specifications at any time and without prior notice. See operator's manual or www.allmand.com website for complete warranty details.

OPTIONS

Maxi-Power 8XR



Cold Weather Package

- Heavy-duty battery 775 CCA @ 0°F (-17.7°C)
- Block heater (120 VAC)



CSA Certification (Canada only)

Telematics Package

(Customer supplied – consult factory)

Emergency Engine Air Shut-off Valve

Lockable Battery Disconnect

2" Bulldog coupler with 3" lunette ring for pintle hitch

2" ball coupler with 3" lunette ring for pintle hitch

Custom Paint



COMPROMISE NOTHING.

At Allmand, our sole focus is providing jobsite support equipment to help your customers get the job done. Whenever they need it. Wherever they are. And whatever it takes. What's more, our genuine commitment to you — the highest standard of service and lowest total cost of ownership — is simply unmatched. Choose the equipment that comes with complete confidence that jobsite productivity won't go dark at 2 a.m. **Allmand. Above All.**



BRIGGS & STRATTON

Milwaukee, WI 53201-0702 USA

(414) 259-5333

Copyright ©2025. All rights reserved.